

Type	C2-A2x/ ... V Standard relay, 2 change-over contacts			
Maximum contact load	10 A/250 V AC1	0,5 A/110 V DC1		
	10 A/30 V DC1	0,2 A/220 V DC1		
Recommended minimum contact load	10 mA/10 V Code 0, 9			
	5 mA/5 V Code 8			

Contacts

Material	Standard	Code 0	AgNi
	Optional	Code 8	AgNi + 10 µ Au
	Optional	Code 9	AgNi + 0,2 µ Au
Max. switching current	10 A		
Max. peak inrush current (20 ms.)	30 A		
Max. switching voltage	250 V		
Max. AC load (Fig 1 1)	2,5 kVA		
Max. DC load	See Fig 2		

Coils

Coil resistance	see table; tolerance ± 10 %
Pull-in voltage	≤ 0,8 x U _N
Pull-in voltage	≥ 0,1 x U _N
Nominal power	2,2 VA (AC)/1,3 W (DC)

Table

VAC	Ω	mA	VDC	Ω	mA
24	67	92	24	443	54
48	296	46	48	1K8	27
115	1K7	19	110	9K2	12
230	7K1	9,5	220	36K1	6

Insulation

Open contact	Volt rms, 1 min
Between adjacent poles	1000 V
Between contacts and coil	2,5 kV
Insulation resistance at 500 V	2,5 kV
Insulation, IEC 61810-1	≥1 GΩ
	2,5 kV/3

Specifications

Ambient temperature operation/storage	-40 (no ice)...60 °C /-40 ... 80 °C
Pick-up time + bounce time	16 ms/≤ 3 ms
Release time + bounce time	8 ms/≤ 1 ms
Mechanical life ops	AC: 10 Mill./DC: 20 Mill.
DC voltage endurance at rated load	≥100000 ops. switching cycles
Operating frequency at nominal load	≤1200/ops/h
Protection degree	IP40
Weight	90 g

Standard types

VAC 50 Hz/60 Hz: 24, 48, 115 (120), 230 (240)

LED

RC Suppressor

VDC 24, 48, 110, 220

LED

Free wheeling diode

Polarity and free wheeling diode

AC/DC bridge rectifier 24 V, 48 V, 60 V

C2-A20/AC ... V	C2-A28/AC ... V	C2-A29AC ... V
C2-A20X/AC ... V	C2-A28X/AC ... V	C2-A29X/AC ... V
C2-A20R/AC ... V	C2-A28R/AC ... V	C2-A29R/AC ... V
C2-A20/DC ... V	C2-A28/DC ... V	C2-A29/DC ... V
C2-A20X/DC ... V	C2-A28X/DC ... V	C2-A29X/DC ... V
C2-A20DX/DC ... V	C2-A28DX/DC ... V	C2-A29DX/DC ... V
C2-A20FX/DC ... V	C2-A28FX/DC ... V	C2-A29FX/DC ... V
C2-A20BX/UC ... V	C2-A28BX/UC ... V	C2-A29BX/UC ... V

"..." Enter the voltage for full type designation


Accessories

Socket:

S2-B, S2-S, S2-L, S2-P, S2-P0

Optional accessories (blanking plug):

SO-NP, SO-OP



Connection diagram




Fig. 1 AC voltage endurance



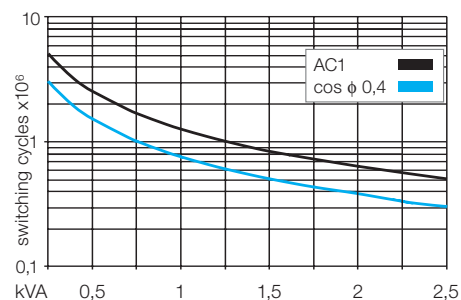



Fig. 2 DC load limit curve

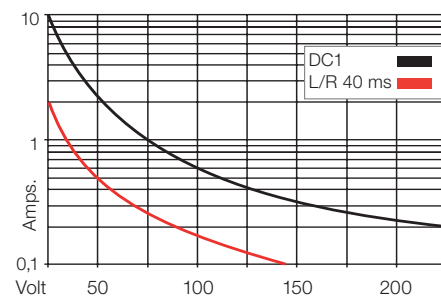

Dimensions [mm]

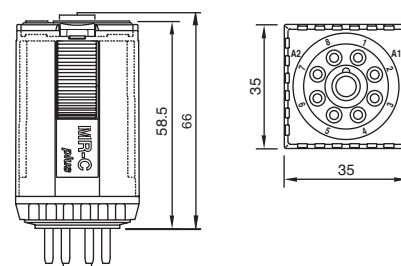

Technical approvals, conformities

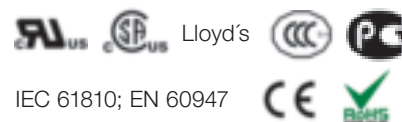

IEC 61810; EN 60947